



Unplugging electrical connector at coolant temperature display sender -G2- - vehicles with 1.9 ltr. TDI engine

Preparations

- Pull oil dipstick -1- out of guide tube.
- Unclip caps.
- Unscrew nuts -arrows- and detach engine cover.
- Remove insulation beneath cover.
- Re-insert dipstick in guide tube.

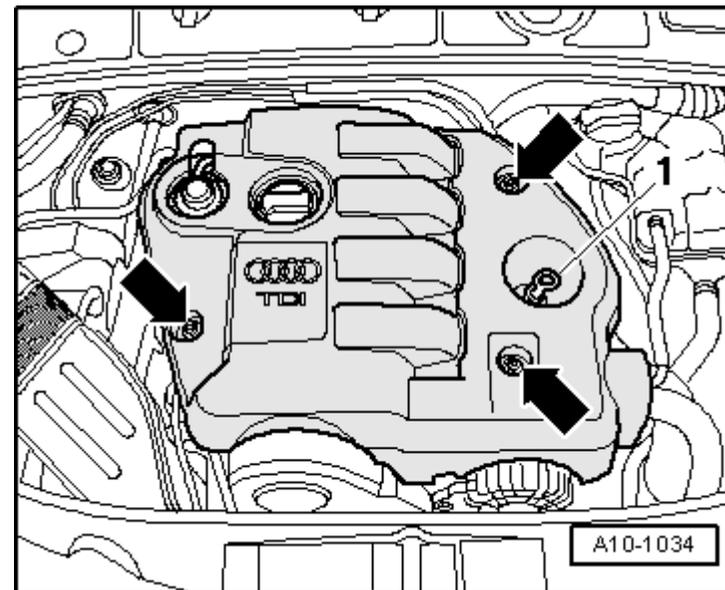

- Unplug electrical connector -1-.
- Remove bolt -2-.
- Remove air pipe -arrows-.

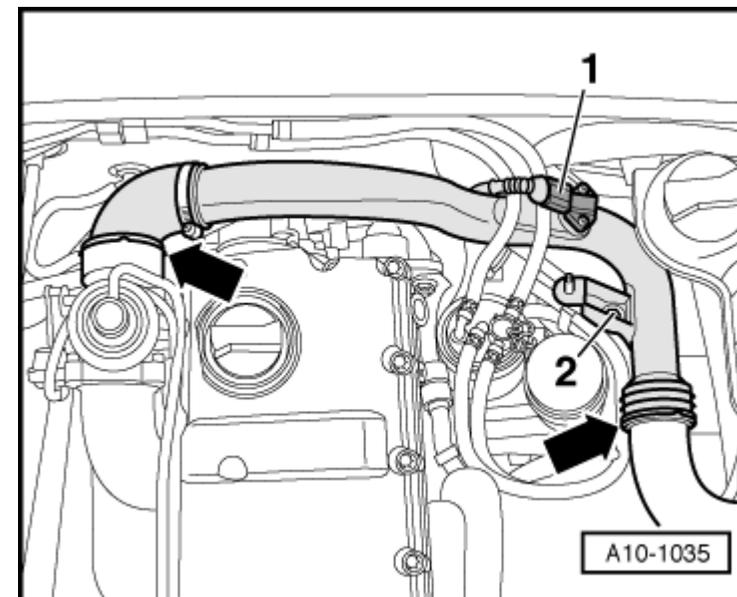

- Unplug electrical connector -3- at coolant temperature display sender -G2-/-G62-.

**Note**

Disregard -item 1-, -item 2- and -item 4-.

Installation is carried out in the reverse order; note the following:

**Note**

- t Hose flanges and hoses for charge air system must be free from oil and grease before fitting.
- t Secure all hose connections with the correct type of hose clips (same as original equipment) → [Parts catalogue](#).

